

OCXO SERIES 2000

■ FEATURES

Miniature OCXO in standard 14-pin DIP package

Fast warm up

Frequencies up to 65 MHz

■ ELECTRICAL PERFORMANCE

PARAMETER	OCXO SERIES 2000
Supply voltage, nom.	5V \pm 5% (3.3V Optional)
Power dissipation steady state	1.5 Watt Max.
Heat up power	3 Watt Max
Heat up time.	3 min Max
Frequency range	1 To 65.536 MHz Standard
Frequency Adjustment	\pm 5PPM Min (0 to 5V)
Freq. stability vs. temperature	LX: 0°C to 60°C \pm 0.10 PPM FZ: -30°C to 70°C \pm 0.25 PPM D3: -40°C to 85°C \pm 0.30 PPM (Standard, contact factory for different temp ranges and stabilities)
Freq. stability vs. supply changes	\pm 0.015 PPM Max for \pm 5% Change
Freq. stability vs. load changes	\pm 0.01 PPM Max for \pm 5% Change
Long term stability (Aging)	\pm 4 PPM Max for 10 Years \pm 0.005 PPM/Day Max.
Output	HCMOS/TTL Standard (Low voltage CMOS Available)
Duty cycle	40/60% to 60/40%
Rise- / fall time	10nS Max. (10%~90%Vout, 90%~10%Vout)
Short term Stability (10MHz)	5 E-10 /1Sec
Phase Noise (Typical at 10MHz under static Conditions)	Offset Phase Noise 10Hz -90 dBc/Hz 100Hz -125 dBc/Hz 1000Hz -135 dBc/Hz 10000Hz -140 dBc/Hz


Note: All Typical parameters for a 10MHz output and 5V Supply, for different frequencies consult factory

■ HOW TO ORDER (PART NUMBER)

Prefix	Output Type	Cut Type	Series	Revision	Temperature Range	Stability	Frequency
OX	2:HCMOS 4:LVC MOS	0:AT (No Vcontrol) 4: AT (Elect Vcontrol)	20:2000	A	First letter Lowest Temperature, Second letter Highest Temperature: From A=-55°C to Z=+70°C, Then: 1=+75°C, 2=+80°C, 3=+85°C... in 5°C steps Example: LZ: +0°C to +70°C LX: +0°C to +60°C FZ: -30°C to +70°C D3: -40°C to +85°C	Value x 10E-2 in PPM Example 28= 0.28PP M 10= 0.1PPM	In MHZ

Example:

OX2020A-D3-28-20.000

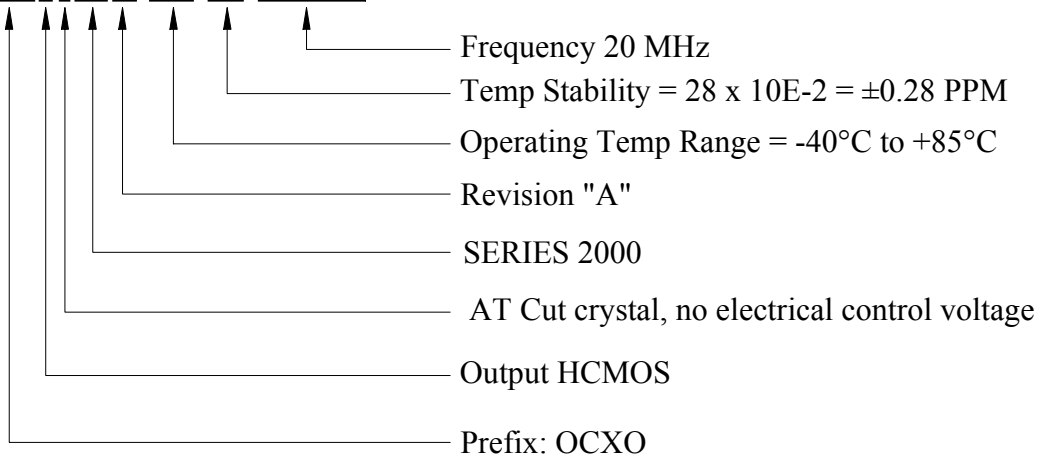

■ **MECHANICAL SPECIFICATION**

