

VSY SERIES: VCXO OSCILLATOR, HCMOS, +2.5 VDC, 7x5mm Package

DESCRIPTION: A crystal controlled, high frequency, highly stable, voltage controlled oscillator, adhering to HCMOS Standards. The output can be Tri-stated to facilitate testing or combined multiple clocks. The device is contained in a sub-miniature, very low profile, leadless ceramic SMD package with 6 gold contact pads. This miniature oscillator is ideal for today's automated assembly environments.

APPLICATIONS AND FEATURES:

- Common Frequencies: 16.384 MHz; 19.44 MHz; 27 MHz; 38.88 MHz; 51.84 MHz; 77.76MHz; 123.6MHz
- +2.5 VDC HCMOS
- Frequency Range from 16 to 130 MHz
- Miniature Ceramic SMD Package Available on Tape and Reel
- Lead Free and ROHS Compliant

■ ABSOLUTE MAXIMUM RATINGS:

| PARAMETER | SYMBOL | VALUE | UNIT |
|-----------------------------|--------|----------------|------|
| Operating temperature range | Ta | -40...+85 | °C |
| Storage temperature range | T(stg) | -55...+90 | °C |
| Supply voltage range | Vcc | -0.5...+4.6 | VDC |
| Maximum Control Voltage | Vc | -0.5...Vcc+0.5 | VDC |
| Maximum Output Voltage | Vo | -0.5...Vcc+0.5 | VDC |

■ ELECTRICAL PARAMETERS:

| PARAMETER | SYMBOL | TEST CONDITIONS ^{*1} | VALUE | UNIT | |
|--------------------------------|-----------------------------------|---|---|---|--|
| Nominal Frequency | fo | | 16.000 ~ 130.000 | MHz | |
| Supply Voltage | Vcc | | +2.5 ±10% | VDC | |
| Supply Current | Is | Nominal Vcc, Nominal Load, +25 ±3°C | Fo=27MHz Fo=35MHz Fo=78MHz Fo=126MHz | 4.0 MAX, 2.8 TYP 6.0 MAX, 4.2 TYP 9.0 MAX, 7.2 TYP 12 MAX 10 TYP | mA |
| Power supply rejection | PsRR | Frequency Change with Vcc varied ±10% | ±1 MAX | ppm | |
| Output Logic Type | | | HCMOS | | |
| Load | | Connected from output to ground | 15 | pF | |
| Output Voltage Levels | Voh Vol | | 0.9•Vcc MIN 0.1•Vcc MAX | VDC VDC | |
| Duty Cycle | DC | Measured at 50% of Vcc | 40/60 to 60/40 or 45/55 to 55/45 | % | |
| Rise / Fall Time ^{*2} | tr / tf | Measured at 20/80% and 80/20% Vcc Levels | Fo<27MHz Fo>35MHz | 3.0 MAX 2.4 TYP 2.5 MAX 2 TYP | ns |
| Jitter | J | RMS Period Jitter 1sigma 1000 samples ^{*4} | | 2.5 TYP | ps |
| Phase Jitter | Jp | RMS Phase Jitter integrated from 12KHz to 20MHz ^{*6} | | 0.6 TYP | ps |
| Phase Noise | £ (Δf) | Typical measured at 100MHz ^{*5} | Δf =100Hz Offset Δf =1KHz Offset Δf =10KHz Offset Δf =100KHz Offset Δf =1MHz Offset | -80 -110 -130 -138 -145 | dBc/Hz dBc/Hz dBc/Hz dBc/Hz dBc/Hz |
| Control Voltage Range | VC | Positive slope; 10% linearity MAX | | 0 to +2.5 | VDC |
| Control Voltage sensitivity | Δf/fc(ΔVc) | | | 100 TYP | ppm/V |
| Absolute Pull Range | APR | Minimum guaranteed freq. pull over Δf/fc | | See Part Numbering ^{*3} | ppm |
| Settability | Vfo | | | +1.25 ± 0.25 | VDC |
| Input Impedance | Zin | DC to 1KHz | | 2 MIN | MΩ |
| Modulation Bandwidth | BW | -3 dB | | 45 MIN | kHz |
| ESD protection | | Human Body Model | | 2000 MIN | VDC |
| Pin 2 | Output Enabled Output Disabled | En Dis | High Voltage or No Connect Ground | 0.7•Vcc MIN 0.3•Vcc MAX | VDC VDC |

- *1 Test Conditions Unless Stated Otherwise: Nominal Vcc, Nominal Load, +25 ±3°C
- *2 Frequency Dependent
- *3 Not All APR's Available With All Temperature Ranges—Consult Factory For Availability
- *4 Measured with Wavecrest SIA-3000A no filtering
- *5 Measured with Agilent 5500
- *6 Calculated from Agilent 5500 phase noise measurements


■ PART NUMBERING SYSTEM:

| SERIES | SYMMETRY | TEMPERATURE RANGE (°C) | APR (ppm) | FREQUENCY (MHz) |
|-----------------------------|--|--|--------------------------|------------------|
| VSY: VCXO with HCMOS Output | A: 40/60 to 60/40% T: 45/55 to 55/45% | R: 0...+50 S: 0...+70 U: -20...+70 V: -40...+85 | F: ±32 ppm H: ±50 ppm | 16.000...130.000 |

EXAMPLE: VSYASH-38.880

VCXO Oscillator, 7x5mm Package, +2.5 VDC Supply Voltage, HCMOS Output, 40/60% Symmetry, 0...+70°C Operating Temperature Range, ±50 ppm APR, 38.880 MHz, Enable High on Pin 2
Consult the factory for any custom requirements.

■ MECHANICAL PARAMETERS:

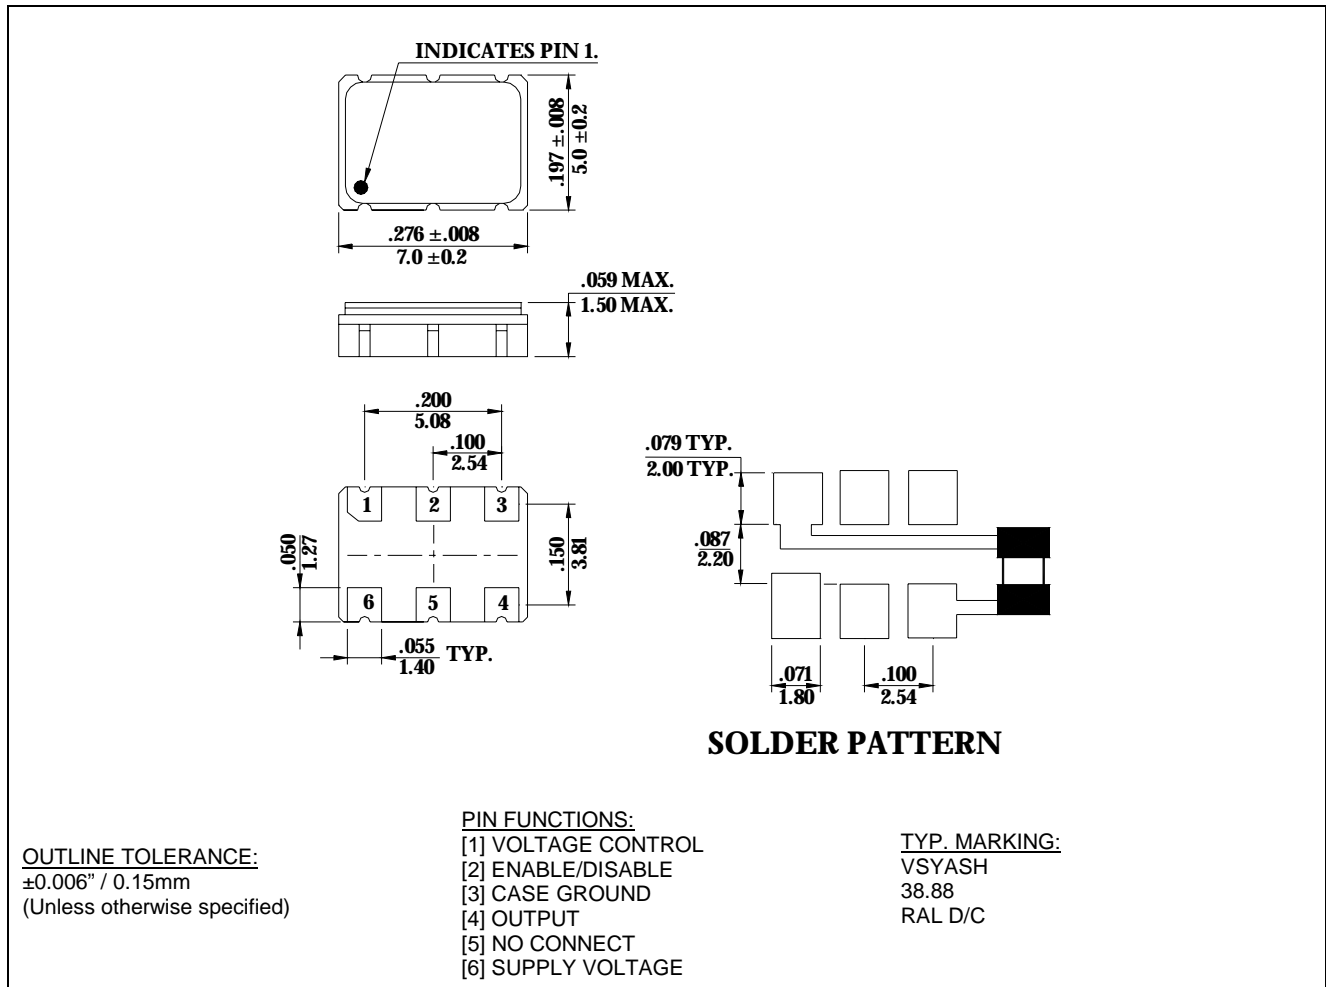

*0.01µF external by-pass filter is recommended as shown on solder pattern

■ REFLOW PROFILE

